


SPECIFICATION:		4P*24AWG+MYLAR+DRAIN+AL.MYLAR CAT6
ITEM		SPECIFICATION
CONDUCTOR	AWG	24AWG
	MATERIAL	BARE COPPER
	COND.SIZE	1/0.60±0.02 mm
INSULATION	MIN.AVG.THICK	0.15 mm
	MATERIAL	HD-PE
	O . D	1.04±0.05 mm
	N O.	4P
MYLAR	COVERAGE	100%
	OVERLAP	25% MIN
DRAIN	AWG	24AWG
	MATERIAL	BARE COPPER
	SIZE	1/0.60±0.008 mm×1PC
Face Inside AL.MYLAR	COVERAGE	100%
	OVERLAP	25% MIN
JACKET	MIN.AVG.THICK	0.60 mm
	MATERIAL	HALF MATT 105°C UV RESISTANCE PVC (TUBE)
	COLOUR	UL813 BLACK IEC6832-58
	O . D	7.00 ± 0.15 mm

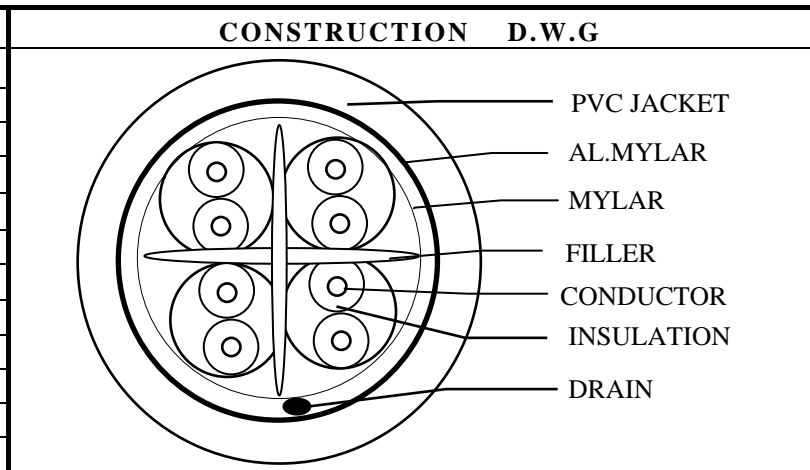

COLOUR CODE:

1.BLUE *WHITE/BLUE	2.ORANGE*WHITE/ORANGE
3. GREEN*WHITE/GREEN	4. BROWN*WHITE/BROWN

ELECTRICAL CHARACTERISTICS

1. Rating : TEMP 75°C :
 2. Conductor Resistance: AT 20°C MAX
 24AWG: 93.25Ω/km;



MARKING

E188601 (UL) CM 75°C 24AWG/4PRS LL84201 CSA
 CMG FT4 CAT6 STP CABLE COPARTNER

REMARK

REMARK			

	PART NO.		
APPROVED		CUSTOMER	
CHECKED		REV	A
DRAWING		DATE	2008/11/13