

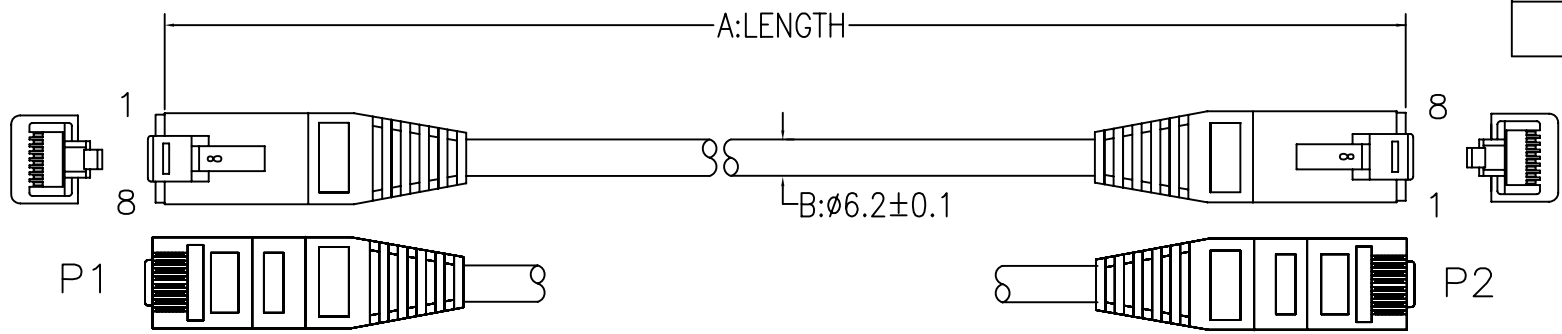



CUSTOMER NO:	REMARK
	Cablematic

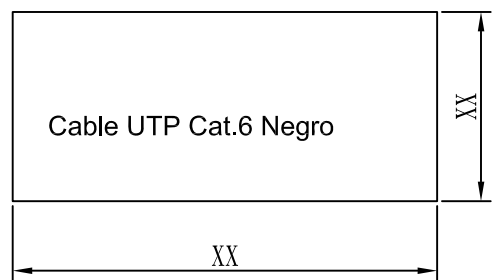

PART NO.:	CUSTOMER NO.:	LENGTH	PE BAG SIZE	LABEL SIZE	CARTON QT'Y
W47C6UBK0.25	RJ41	250±30MM	6"*8"*0.06MM	40*60mm	300PCS
W47C6UBK0.50	RJ42	500±30MM	6"*8"*0.06MM	40*60mm	180PCS
W47C6UBK1.0	RJ43	1000±30MM	6"*8"*0.06MM	40*60mm	150PCS
W47C6UBK2.0	RJ44	2000±30MM	6"*8"*0.06MM	40*60mm	100PCS
W47C6UBK3.0	RJ45	3000±30MM	6"*8"*0.06MM	40*60mm	80PCS
W47C6UBK4.0	RJ46	4000±40MM	8"*10"*0.08MM	40*60mm	60PCS
W47C6UBK5.0	RJ47	5000±50MM	8"*10"*0.08MM	40*60mm	50PCS

PINOUT:

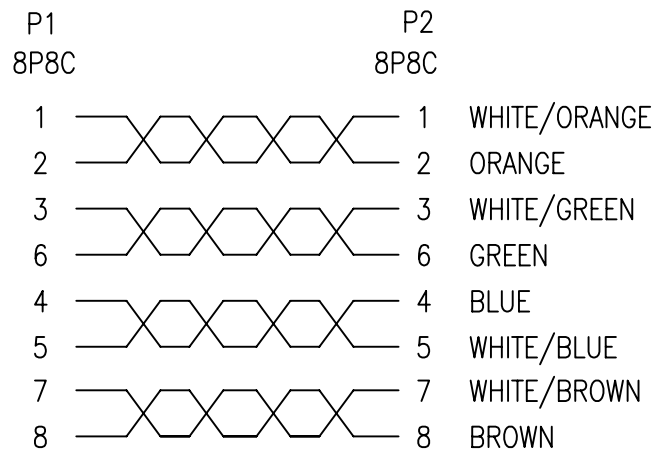

3	OUTER JACKET PVC 45Pa BLACK(1101) (RoHS)
2	RJ45 8P8C PLUG GOLD 30U" FOR UTP (RoHS)
1	CAT.6 UTP 24#4P(7*0.185) COPPER STRANDED TYPE OD:6.2MM BLACK(1101) W/"+" XXXXMM (RoHS)

B	增加描述	WUZAN	29/09/2010
REV.	DESCRIPTION	C.N.	DATE
<small>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF WIRETEK COMPUTER LIMITED AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF WIRETEK COMPUTER LIMITED.</small>		TITLE	
<small>UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1.0°</small>		UTP CABLE	
DIMENSIONS	TOLERANCE	CHKD.	CONF.
0.00 TO 30.00mm	±0.10mm		
30.01 TO 80.00mm	±0.13mm	DR.	APPD.
80.01 TO 150.00mm	±0.15mm		
150.01mm +	±0.20mm	PART NO.	
MATERIAL	MATERIAL	SCALE	SHEET 1/2 UNIT MM SIZE A4 REV. B
FINISH	FINISH		