

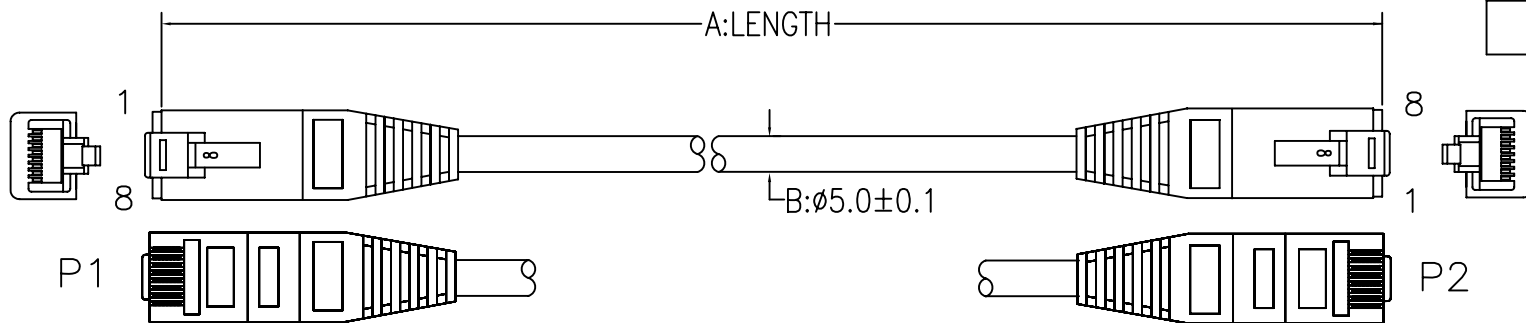
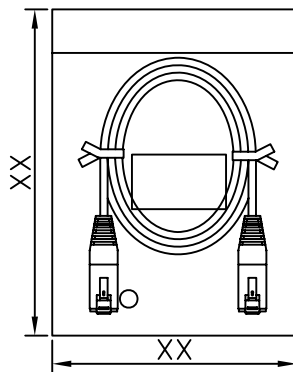


CUSTOMER NO:	REMARK
	Cablematic

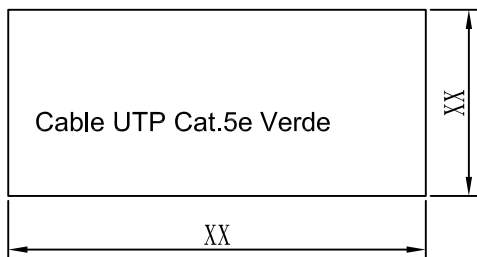

PART NO.:	CUSTOMER NO.:	LENGTH	PE BAG SIZE	LABEL SIZE	CARTON QT'Y
W47C5UGR0.25	RL21	250±30MM	6"*8"*0.06MM	40*60mm	500PCS
W47C5UGR0.5	RL22	500±30MM	6"*8"*0.06MM	40*60mm	250PCS
W47C5UGR1.0	RL23	1000±30MM	6"*8"*0.06MM	40*60mm	180PCS
W47C5UGR1.8	RL24	1800±30MM	6"*8"*0.06MM	40*60mm	120PCS
W47C5UGR3.0	RL25	3000±30MM	6"*8"*0.06MM	40*60mm	100PCS
W47C5UGR4.0	RL26	4000±40MM	8"*10"*0.08MM	40*60mm	80PCS
W47C5UGR5.0	RL27	5000±50MM	8"*10"*0.08MM	40*60mm	60PCS

PINOUT:

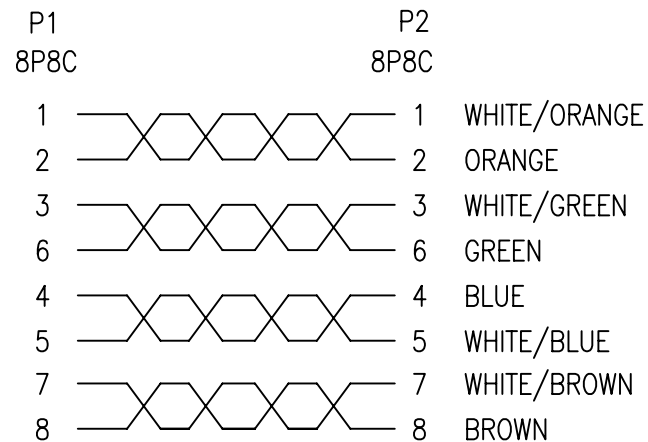

3	OUTER JACKET PVC 45Pa GREEN(1601) (RoHS)
2	RJ45 8P8C PLUG PLATED GOLD 3U" UN/SHIELD (RoHS)
1	CAT. 5E UTP CABLE 26#4P(7/0.16) CCA STRANDED TYPE GREEN(1601) OD:5.0MM XXXXMM (RoHS)

B	增加描述	WUZAN	29/09/2010
REV.	ECR	DESCRIPTION	C.N. DATE
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF WIRETEK COMPUTER LIMITED AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF WIRETEK COMPUTER LIMITED.		TITLE	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1.0°		UTP CABLE	
DIMENSIONS	TOLERANCE	CHKD.	CONF.
0.00 TO 30.00mm	±0.10mm		
30.01 TO 80.00mm	±0.13mm	DR.	APPD.
80.01 TO 150.00mm	±0.15mm		
150.01mm	±0.20mm	PART NO.	W47C5UGRXX
MATERIAL	MATERIAL	SCALE	SHEET 1/2 UNIT MM SIZE A4 REV. B
FINISH	FINISH		